




Falls Filtration Technologies, Inc

CLOSED CIRCUIT MULTIMAZE CCLR

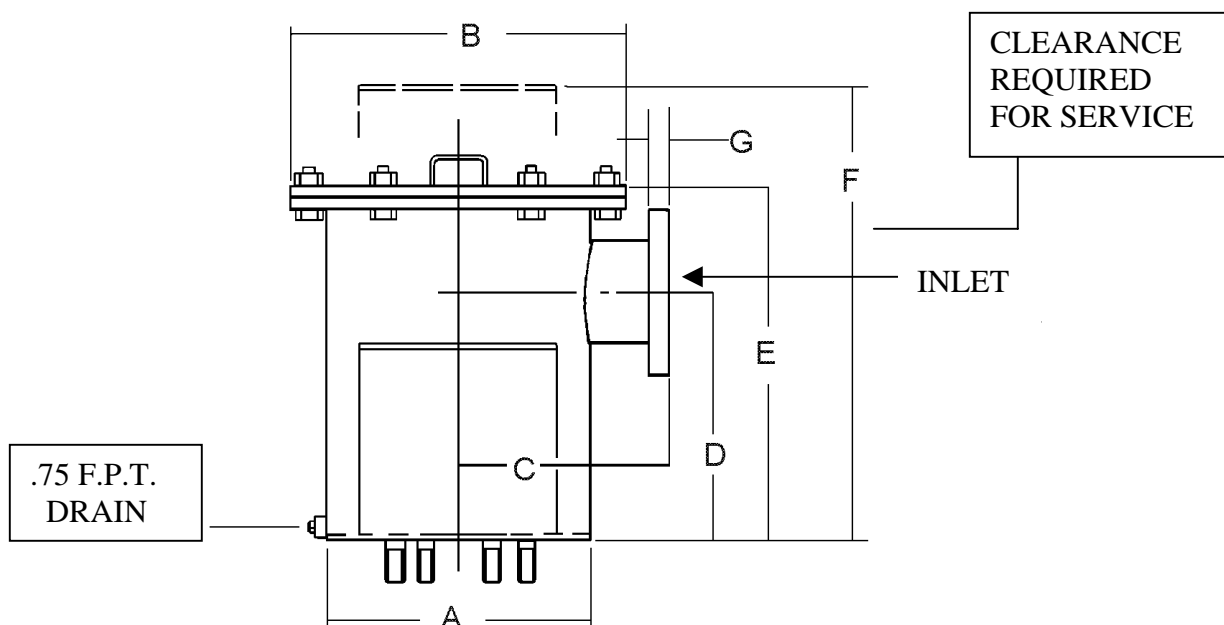

Inlet and outlet same size and match 125lb American Standard 125# flange.

Working Pressure 25 P.S.I. max.

For performance data refer to Multimaze brochure.

Model No.	A	B	C	D	E	F	G	Flow Cap	WGT LBS
CCLR8M	10.12	13.00	8.38	10.75	15.00	23.00	.25	400	60
CCLR10M	12.00	15.00	9.38	13.25	18.00	28.00	.25	700	85
CCLR12M	14.62	17.62	10.75	15.88	21.62	33.50	.375	1000	133
CCLR14M	17.50	20.56	12.12	18.88	25.38	39.20	.375	1350	175
CCLR18M	21.00	24.62	14.50	25.00	34.00	51.75	.375	2250	355
CCLR22M	28.00	31.62	18.12	29.50	39.25	61.00	.375	3250	580
CCLR30M	35.62	39.88	22.50	40.62	53.88	83.50	.375	6000	1210
CCLR36M	43.75	48.12	26.75	48.75	64.25	89.75	.375	8600	2040

Falls Filtration Technologies Inc.
115 East Steels Corners Rd.
Stow, Ohio 44224
PH. 330-928-4100 FX. 330-928-0122
www.fallsfti.com